

Date: 20/Sep/2015

Overall Information

Table1- Overall Information

	rable1 Overall information		
Vehicle plate number	85423		
CPK data logger number	LN: 001505, DN: 2001, Sim Number +989218469621		
Bus line	Number 4 (south to north bus line)		
Bus Terminals	South Bus Terminal - Park Way Bus Tehran Terminal		
Total path distance	22.8 km		
DPF producer company	HJS_02 (active system with FBC – electrical heater)		
Installation date	19/Feb/2015		
Report period	16/Aug/2015- 31/Aug/2015 (sixteen days)		
K value - DPF upstream	1.00 [1/m]		
K value – DPF downstream	0.00 [1/m]		

Table 2- DPF Maintenance History

Filter maintenance date	DPF has been working from installation date until now without any cleaning.
Dosing status	Dosing value has been kept constant from installation date until now.



Date: 20/Sep/2015

Table 3- Fuel and Additive Consumption Information

rable 5 Taerana Adamité e	Table 3-1 del ana Additive Consumption Injormation			
Bus mileage (from DPF installation date)	31817 km			
Bus mileage over the period	1984 km			
Working days over the period	11 days			
Stop days	5 days			
Data logger working days	11 days			
Working hours over the period	130 hours 45 minutes			
Average working hours per day (including stop days)	8 hours 10 minutes			
Bus average speed	15.17 km/hr			
idle speed time to all working time ration	52.77 %			
Total Bus fuel consumption over the period	1227 lit			
Fuel consumption per hour	9.38 lit/hr			
Average fuel consumption	0.62 lit/km			
Total Bus additive consumption over the period	0.595 lit			
Average additive consumption	300 cc/km			
Additive consumption to fuel ration	485 cc per 1000 lit (batch dosing with tank level)			



Date: 20/Sep/2015

Temperature, Pressure and Engine Speed Overview

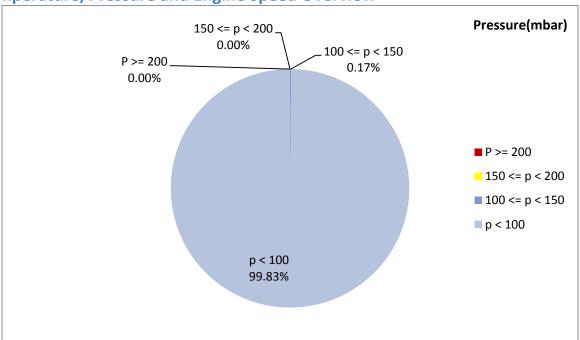


Figure 1- Pressure distribution over the working hours

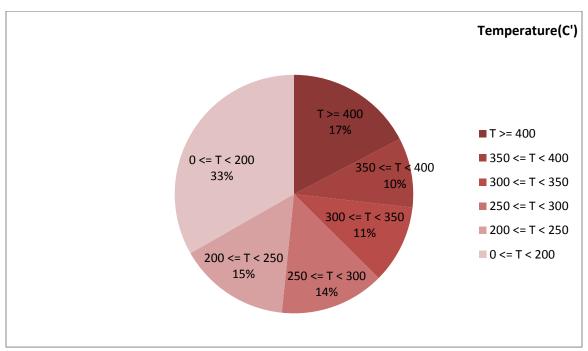


Figure 2-Temperature distribution over the working hours



Date: 20/Sep/2015

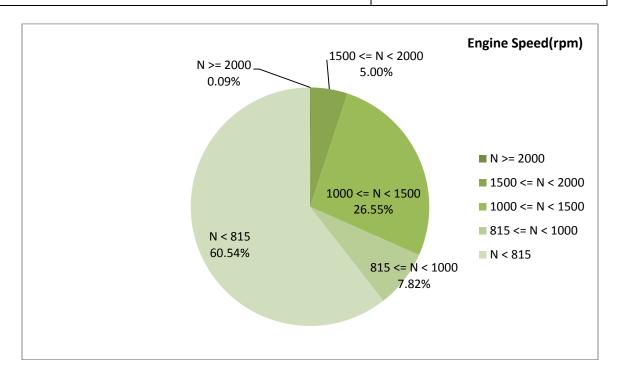


Figure 3- Engine speed distribution over the working hours

Table 4- Mean values

Mean temperature (C)	Mean pressure(mbar)	Mean engine speed(rpm)
278.45	11.53	822

Table 5- Mean values without idling

Mean temperature (C)	Mean pressure(mbar)	Mean engine speed(rpm)
356.9	23.26	1129

Table 6- Max-min values

Max-min temperature(C)	Max-min pressure(mbar)	Max-min engine speed(rpm)
698-50	138-0	2144-256



Date: 20/Sep/2015

Detailed Pressure Analysis

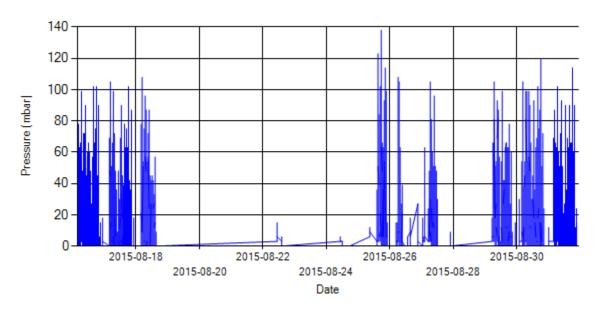


Figure 4- Pressure distribution over the period

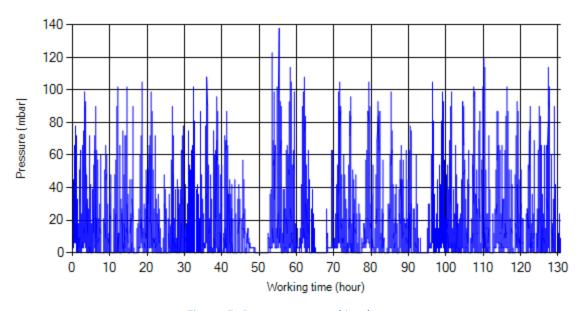


Figure 5- Pressure vs. working hours

Notice: backpressure distribution was shown into two diagrams. As obvious in figure 5, stopworking periods were eliminated and pressure was displayed along working hours.



Date: 20/Sep/2015

Detailed Temperature Analysis

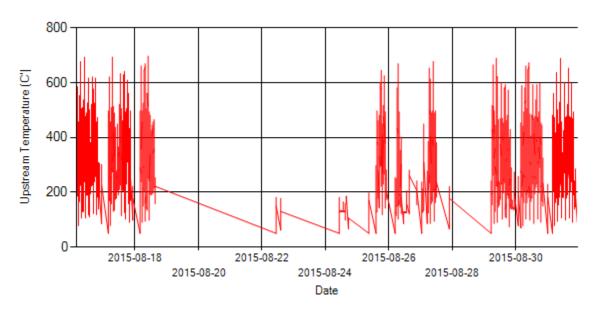


Figure 6- Temperature distribution over the period

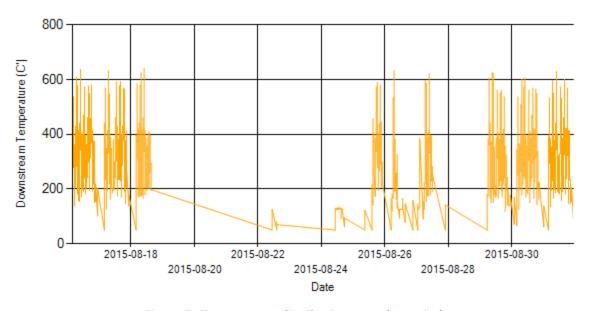


Figure 7- Temperature distribution over the period



Date: 20/Sep/2015

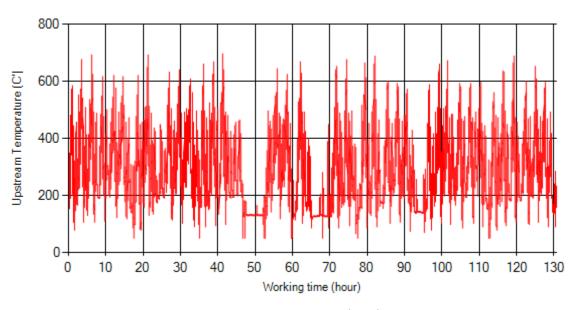


Figure 8- Temperature vs. working hours

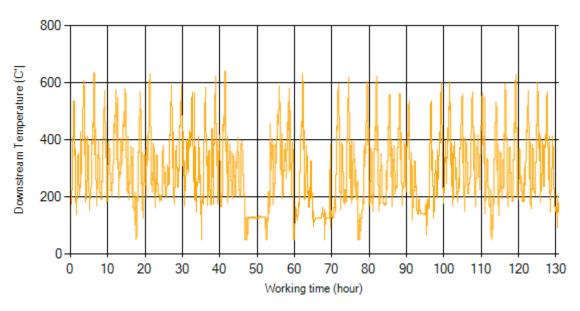


Figure 9- Temperature vs. working hours



Date: 20/Sep/2015

Engine Speed Diagrams

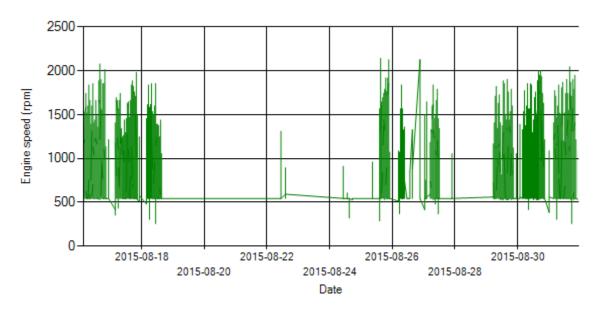


Figure 10- Engine speed distribution over the period

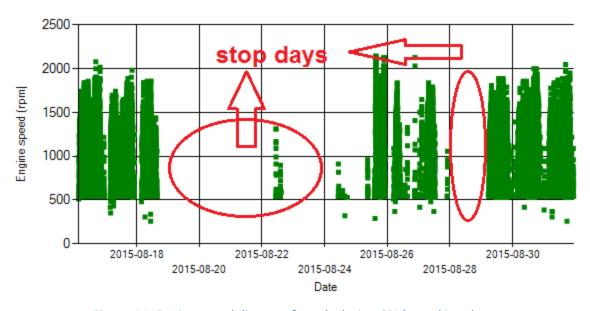


Figure 11- Engine speed diagram for calculating CPK's working days



Date: 20/Sep/2015

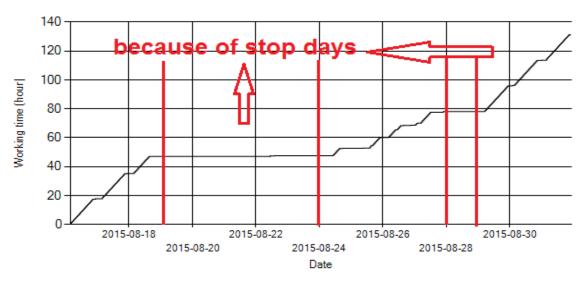


Figure 12- Time diagram for calculating CPK's working days

Notice: Data logger sampling time can be calculated from Figure 12. The lines parallel with Date axis show days without data logger data.

Pressure-Engine Speed diagrams

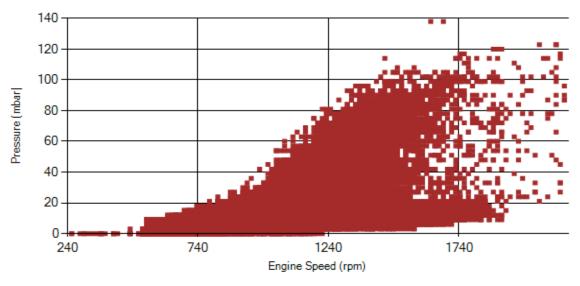


Figure 13- Pressure against engine speed

Notice: Red alarm (pressure>200 mbar) and yellow alarm (200>pressure>150) ranges can't be observed during this period.



Date: 20/Sep/2015

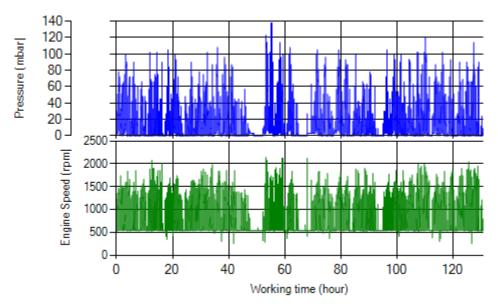


Figure 14- P, N distribution vs. working hours

Temperature-Engine Speed diagrams

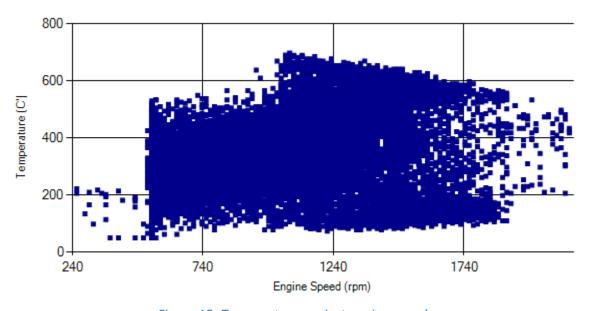


Figure 15- Temperature against engine speed



Date: 20/Sep/2015

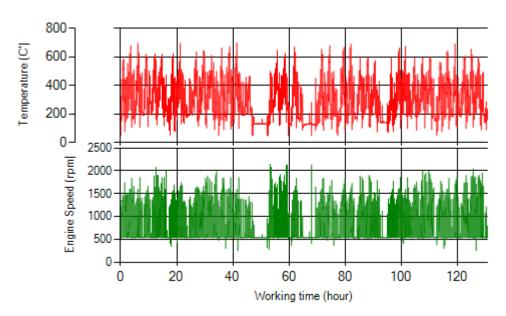


Figure 16- T, N distribution vs. working hours

Filter Operation Analysis

- As depicted in figure 1, pressure above 150 mbar wasn't observed during this period.
- Figure 2 displays flow temperature distribution for DPF's upstream. It can be obviously observed that 17% of total working-time temperature is above 400 °C and 27% above 350°C.
- This vehicle operates in line 4, so due to path characteristic of this line, engine operates in high speed.

Filter energies status	Excellent ■	Good □
Filter operation status	Maintenance required □	Failed□