

Date: 10/Oct/2015

Overall Information

Table1- Overall Information

Vehicle plate number	78515	
CPK data logger number	LN: 001490, DN: 1954, Sim Number+98000000000	
Bus line	Number 4 (south to north bus line)	
Bus Terminals	Tehran South Bus Terminal - Park Way Bus Terminal	
Total path distance	22.8 km	
DPF producer company	Dinex_01 (passive system with FBC)	
Installation date	22/Oct/2014	
Report period	16/Sep/2015 – 30/Sep/2015 (fifteen days)	
K value - DPF upstream	1.4 [1/m]	
K value – DPF downstream	0.00 [1/m]	

Table 2- DPF Maintenance History

Filter maintenance date	Filter core was changed on 15/Feb/2015.
Dosing status	Dosing value was reduced by 70% on March February 15 th . (Secondary value/Initial value=0.3)



Date: 10/Oct/2015

Table 3- Fuel and Additive Consumption Information

rable bir act and readilities co.	<u> </u>
Bus mileage (from DPF installation date)	48503 km
Bus mileage over the period	580 km
Working days over the period	2 days
Stop days	13 days
Data logger working days	2 days
Working hours over the period	31 hours 52 minutes
Average working hours per day (including stop days)	2 hours 7 minutes
Bus average speed	18.2 km/hr
idle speed time to all working time ration	49.47 %
Total Bus fuel consumption over the period	325 lit
Fuel consumption per hour	10.2 lit/hr
Average fuel consumption	0.56 lit/km
Total Bus additive consumption over the period	- lit
Average additive consumption	- cc/km
Additive consumption to fuel ration	- cc/1000lit

Notice: System worked only three days during this period, so additive consumption measurement was so hard and unreliable.



Date: 10/Oct/2015

Temperature, Pressure and Engine Speed Overview

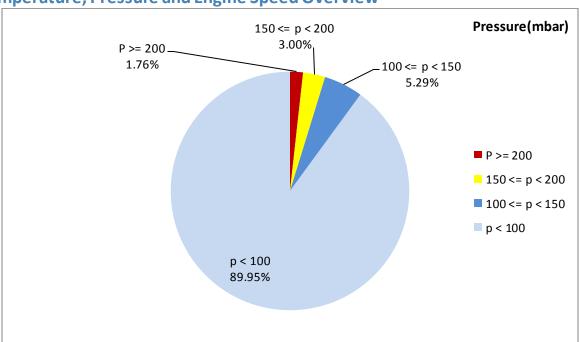


Figure 1- Pressure distribution over the working hours

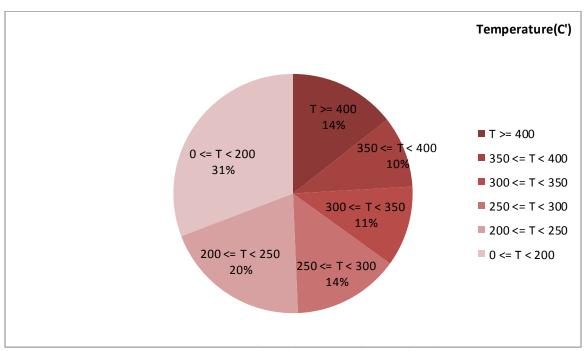


Figure 2-Temperature distribution over the working hours



Date: 10/Oct/2015

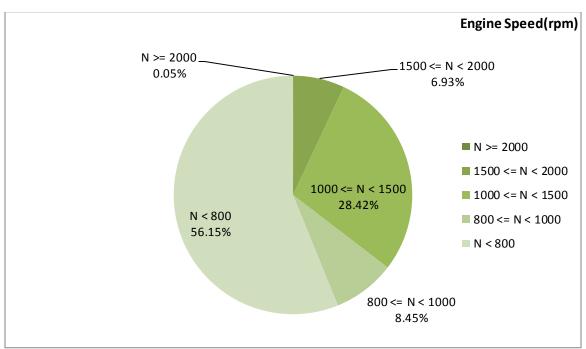


Figure 3- Engine speed distribution over the working hours

Table 4- Mean values

Mean temperature (C)	Mean pressure (mbar)	Mean engine speed(rpm)
270.47	39.06	854

Table 5- Mean values without idling

Mean temperature (C)	Mean pressure(mbar)	Mean engine speed(rpm)
320.94	64.45	1149

Table 6- Max-min values

Max-min temperature(C)	Max-min pressure (mbar)	Max-min engine speed (rpm)
574-50	288-0	2112-368



Date: 10/Oct/2015

Detailed Pressure Analysis

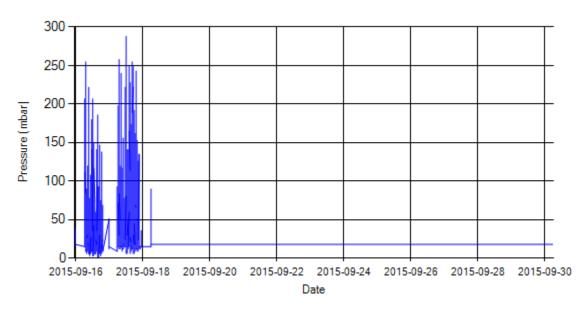


Figure 4- Pressure distribution over the period

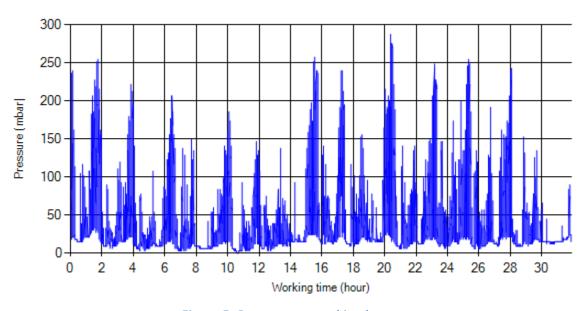


Figure 5- Pressure vs. working hours

Notice: backpressure distribution was shown into two diagrams. As obvious in figure 5, stopworking periods were eliminated and pressure was displayed along working hours.



Date: 10/Oct/2015

Detailed Temperature Analysis

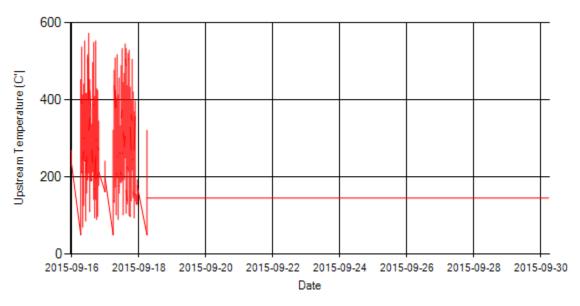


Figure 6- Temperature distribution over the period

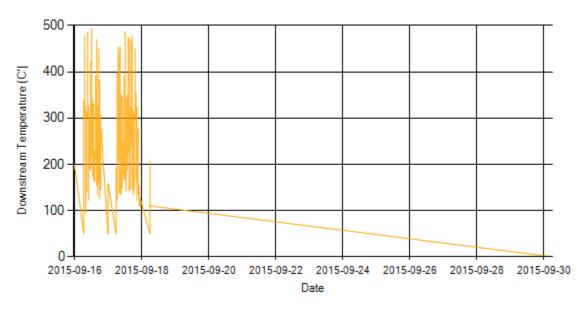


Figure 7- Temperature distribution over the period



Date: 10/Oct/2015

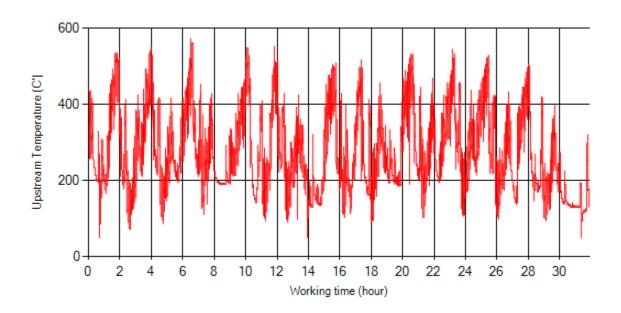


Figure 8- Temperature vs. working hours

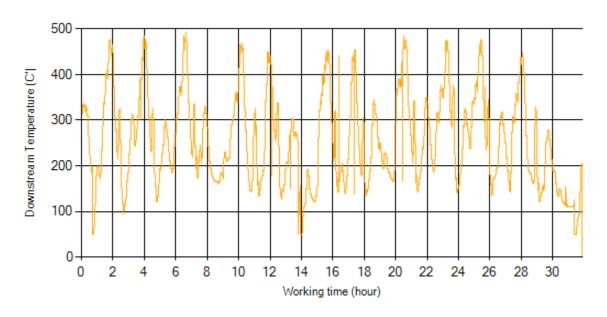


Figure 9- Temperature vs. working hours



Date: 10/Oct/2015

Engine Speed Diagrams

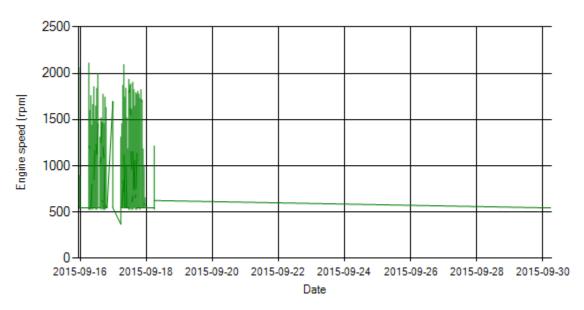


Figure 10- Engine speed distribution over the period

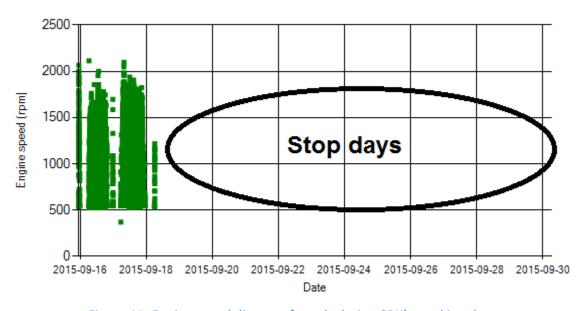


Figure 11- Engine speed diagram for calculating CPK's working days



Date: 10/Oct/2015



Figure 12- Time diagram for calculating CPK's working days

Notice: Data logger sampling time can be calculated from Figure 12. The lines parallel with Date axis show days without data logger data.

Pressure-Engine Speed diagrams

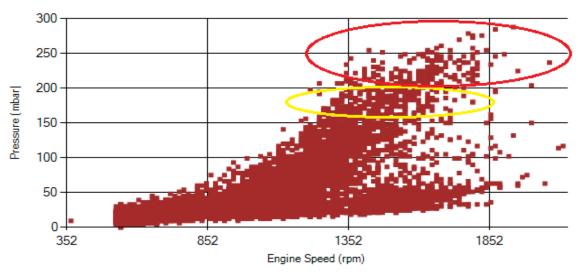


Figure 13- Pressure against engine speed

Notice: Red alarm (pressure>200 mbar) and yellow alarm (200>pressure>150) ranges were indicated in figure 13.



Date: 10/Oct/2015

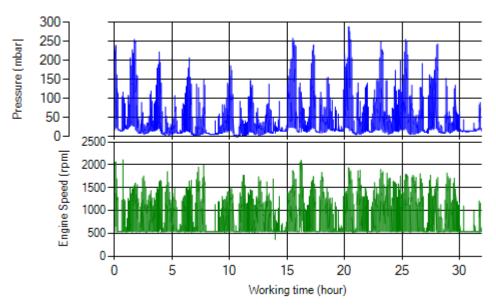


Figure 14- P, N distribution vs. working hours

Temperature-Engine Speed diagrams

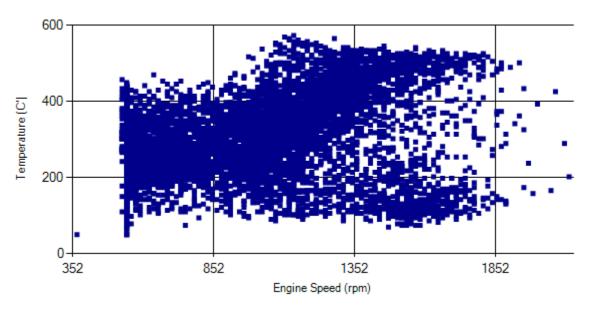


Figure 15- Temperature against engine speed



Date: 10/Oct/2015

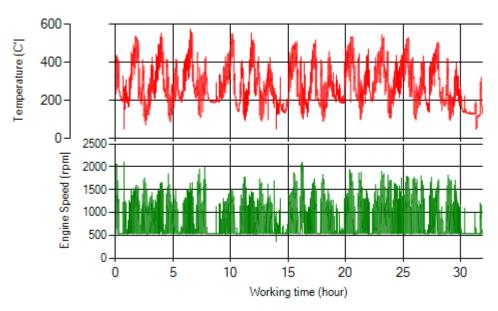


Figure 16- T, N distribution vs. working hours

Filter Operation Analysis

- As depicted in figure 1, 1.76% of working time pressure was above 200 mbar and only 4.76% above 150mbar.
- Figure 2 displays flow temperature distribution for DPF's upstream. It can be obviously observed that 14% of total working time, temperature is above 400 °C and 24% above 350°C.

Filton anamation atatus	Excellent	Good ■
Filter operation status	Maintenance required □	Failed□